

4" ROUND HOCKEY PUCK SUMPLESS SUCTION OUTLET COVER



**VGB CERTIFIED
SPECIFICATIONS**

Floor Flow Rating
56 GPM at 3.5 fps

Wall Flow Rating
56 GPM at 3.5 fps

Sump Depth
SumpleSS

Open Area
5.2 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

See next page for six adapter plates sold separately, available for sumpleSS connections to 1022s, 1.5" female adapters, 1.5" and 2" inside and outside slip and threads

Easily and safely retrofits many HydroAir/ITT parts

Manufactured from superior UV-resistant engineered polymers

#316 stainless steel screws (3) for brass inserts

Trademarked VGB compliance button easily identifies VGB 2008 compliant cover from on deck and underwater

Online product support including downloadable CAD files, certificate of conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

25 per case



No sump required!



Part # 4HPxxx

STANDARD COLORS



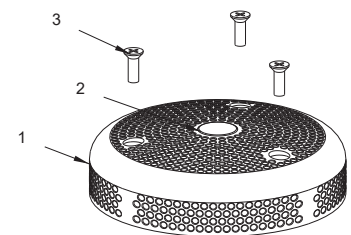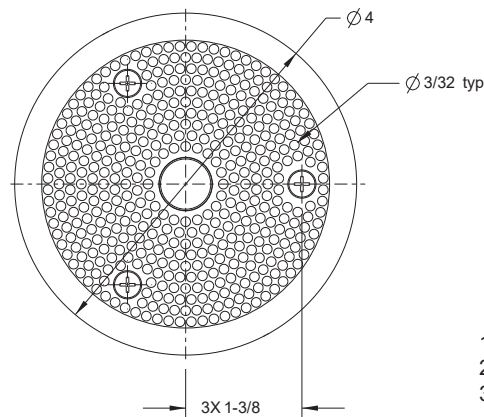


- ☐ 4HP101 – White
- ☐ 4HP102 – Black
- ☐ 4HP103 – Light Gray
- ☐ 4HP104 – Blue
- ☐ 4HP105 – Dark Gray
- ☐ 4HP108 – Tan



1. 4" Suction Outlet Cover
2. VGB Compliance Button
3. 8-32 x 1/2" Flat Head Phillips Screw, 316 SS, Qty 3

VGB 2008 Compliant

ADDITIONAL PRODUCT CONFIGURATIONS FOR 4HPXXX (sold separately)

STANDARD COLORS  101  102  103  104  105  108

FEATURES: Adapter Plates for 4HPxxx and 6HPHxxx

Brass inserts

Manufactured from superior UV-resistant engineered polymers/ABS

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Variety of combinations available for sumpless connections to 1022s, 1.5" female adapters, 1.5" and 2" inside and outside slip and threads; baseplates sold separately

Downloadable CAD files available

25 per case

Code Key:

4 = For 4HPxxx

xxx = Color
(i.e. 101 = White)

15 = 1½"

20 = 2"

25 = 2½"

SI = Slip Insider

T = Thread


6 = For 6HPHxxx

HP = "Hockey Puck" Cover

4" Bulkhead Adapter with 2" Slip-Insider Sumpless Fitting




Part #
420SIxxx

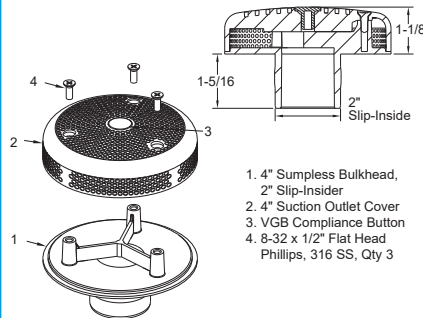

4" Bulkhead Adapter with 1½" Slip-Insider Sumpless Fitting




Part #
415SIxxx

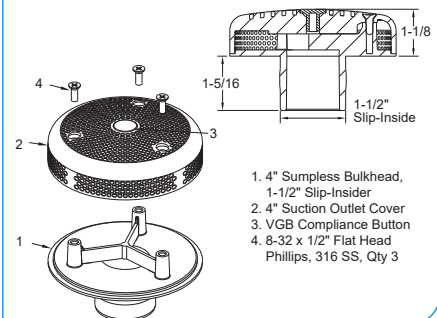

4" Bulkhead Adapter with 2" Threaded x 1½" Socket Sumpless Fitting




Part #
420T15Sxxx

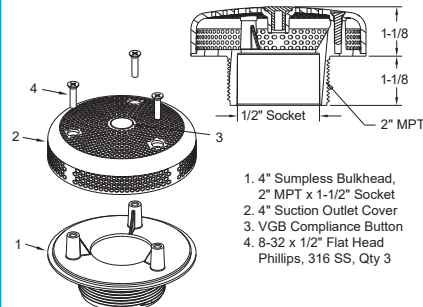

4" Bulkhead Adapter with 1½" Threaded Sumpless Fitting




Part #
415Txxx

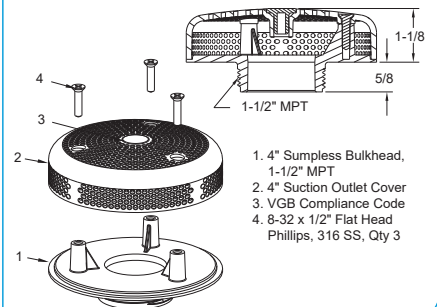

Retrofit 4" Bulkhead Adapter with 1½" Threaded Sumpless Fitting



Part #
R415Txxx
Also retrofits HydroAir
#10-6906 and #10-6806

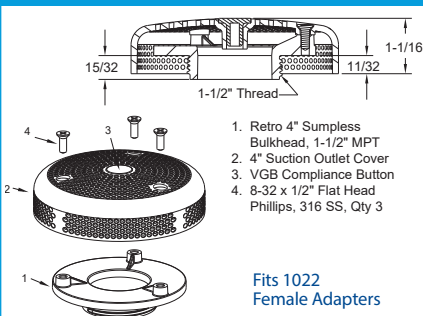

Retrofit 4" Bulkhead Adapter with 1½" Extended Threaded Sumpless Fitting



Part #
RE415Txxx
Also Retrofits HydroAir
#10-6906 and #10-6806

